




**DIMENSIONS**

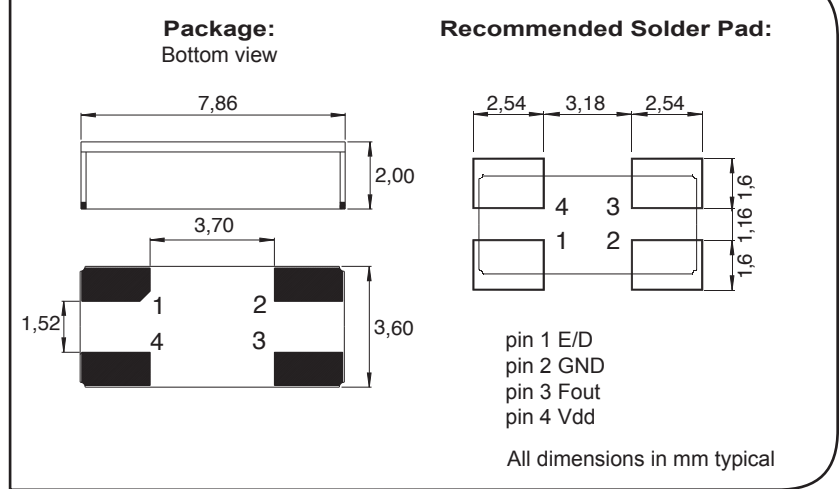

**SMT Clock oscillator in ceramic package**  
**Fundamental quartz mode frequency**  
**High shock and vibration resistance**  
**Wide temperature range**  
**Low aging**  
**Ultra low MSL**  
**Very fast start-up**  
**Excellent solderability**  
**Swiss made quality**  
**Customer specification on request**

**DESCRIPTION:**

This SMD oscillator in ceramic package has been specially designed for surface mount using infrared, vapor phase or epoxy techniques.

**APPLICATIONS:**

- Avionics
- Airbone equipments
- Remote control
- Security application
- Radio Transceiver
- Microprocessor clocks

The MCSO1's are supplied on trays (91 pcs / tray)  
 For pick-and-place equipment, the parts are available in 16mm tapes with 250 parts min 1000 parts max

**ELECTRICAL CHARACTERISTICS AT +25°C**

<b>Frequency stability</b> Over temperature range (see ordering info) Including: adjustment at +25°C long term aging 10 years over supply voltage ±5% over load min to max	$\Delta F/F$	$\leq \pm 100$	ppm
<b>Frequency stability version T</b> Over temperature range (see ordering info) Including: adjustment at +25°C long term aging 1 year over supply voltage ±5% over load min to max	$\Delta F/F$	$\leq \pm 50$	ppm
Supply voltage ± 5% 1)* Version 1.2V available on request	Vdd	1.8 / 2.5 / 3.3	V
Input current	Idd	see table 1	
Output signal		HC-MOS compatible	
Symmetry at Vdd/2		40 / 60	%
Rise & fall time ≤ 20MHz For F=32.768 kHz rise & fall time ≤ 150ns (load 15pf 20% to 80%)		≤7	ns
Rise & fall time ≥ 20MHz (load 15pf 10% to 90%)		≤3	ns
Level "0" & "1"		<0.4>Vdd-0.5	V
Start-up time	t	<5	ms
Load min / max		3/47	pF
Jitter ≤ 20MHz one sigma		< 2rms	ps
Jitter > 20MHz one sigma		< 10rms	ps

\* 1) C = 47nF ceramic must be connected between GND & Vdd

