

RPT5032A

1.0 Specification References

Parameter	Description
a. Rakon part number	E6762LF
b. Description	10.0MHz RPT5032A TCXO
c. Version	A (2014-11-20) - PROVISIONAL
d. Package	L x W: 5.0 x 3.2 mm nom., H: 2.1 mm max (6 pad)



2.0 Absolute Maximum Ratings ¹

Parameter	Min.	Max.	Unit.
a. Junction temperature		150	°C
b. Supply voltage (Vcc)	-0.5	7	V
c. All other inputs	-0.5	Vcc + 0.5	V
d. Power dissipation		100	mW

3.0 Frequency Characteristics

Parameter	Min.	Typ.	Max.	Unit	Test Condition / Description
a. Nominal frequency		10.0		MHz	
b. Frequency calibration			±1	ppm	Initial accuracy at 25°C ±1°C
c. Reflow shift			±0.5	ppm	Pre to post reflow ΔF (measured ≥ 60 minutes after reflow)
d. Operating temperature range	-20		70	°C	
e. Frequency stability over temperature			±50	ppb	Reference to (F _{MAX} + F _{MIN})/2
f. Slope over temperature			±50	ppb/°C	ΔF/ΔT
g. Supply voltage stability		±25		ppb	±5% variation, reference to frequency at nominal supply voltage
h. Load sensitivity		±50		ppb	±10% variation, reference to frequency at nominal load
i. Long term stability			±1 ±3	ppm ppm	1 year 10 years
j. Acceleration stability		< 2		ppb/g	Gamma vector, 3-axes, 30-1500Hz
k. Start-up time			15	ms	90% amplitude

4.0 Power Supply

Parameter	Min.	Typ.	Max.	Unit	Test Condition / Description
a. Supply voltage (Vcc)		5.0		V	±5%
b. Supply current		3	4	mA	

¹ Operating beyond this limit may result in change or permanent damage to the device.

5.0 Oscillator Output – HCMOS

Parameter	Min.	Typ.	Max.	Unit	Test Condition / Description
a. Output waveform					HCMOS (LVCMOS & LVTTTL compatible as per JESD8C)
b. Output voltage level low (V_{OL})			10% V_{CC}	V	
c. Output voltage level high (V_{OH})	90% V_{CC}			V	
d. Rise and fall time			8	ns	10% to 90% level
e. Duty cycle	45		55	%	At 50% level
f. Load		15		pF	

6.0 Tri-State Control ²

Parameter	Min.	Typ.	Max.	Unit	Test Condition / Description
a. Tri-state mode					The device features a tri-state mode which allows the output to be disabled and brought into a high impedance state
b. Tri-state control (pin 6), input level low (V_{IL})			20% V_{CC}	V	Device disabled (output in high impedance state)
c. Tri-state control (pin 6), input level high (V_{IH})	60% V_{CC}			V	Device enabled (operating)
d. Current when in tri-state mode		2		mA	
e. Output enable time			100	μ s	

7.0 Pin Connections

Parameter	Connections
a. Pin 1	Do not connect (GND optional)
b. Pin 2	GND
c. Pin 3	Do not connect
d. Pin 4	RF Output
e. Pin 5	Supply Voltage (V_{CC})
f. Pin 6	Tri-state Control (Enable) ²

8.0 SSB Phase Noise and RMS Jitter (at 25°C)

Parameter	Typ.	Max.	Unit.	Test Condition / Description
a. 1Hz offset	-70		dBc/Hz	
b. 10Hz offset	-90		dBc/Hz	
c. 100Hz offset	-120		dBc/Hz	
d. 1kHz offset	-141		dBc/Hz	
e. 10kHz offset	-150		dBc/Hz	
f. 100kHz offset	-152		dBc/Hz	
g. 1MHz offset	-155		dBc/Hz	
h. RMS Jitter	1		ps	12kHz ~ 5MHz

² The tristate control (enable) input pin has an internal 100k Ω pull up resistor which allows it to be left unconnected if not used. When in tristate mode, the output stage is disabled, but the oscillator and compensation circuit are still active.

9.0 Root Allan Variance (at 25°C)

Parameter	Min.	Typ.	Max.	Unit	Test Condition / Description
a. Root Allan Variance		$2 \cdot 10^{-10}$			tau = 1.0s

10.0 Marking

Parameter	Description
a. Type	Laser marked
b. Line 1	[R X XX] R = Rakon, X XX = manufacturing identifier
c. Line 2	[Δ 6762 YW] Δ = pin 1 mark, 6762 = abbreviated part number, YW = device date code

11.0 Manufacturing Information

Parameter	Description
a. Reflow soldering	See reflow profile diagram
b. Packaging description	Tape and reel. Standard packing quantity is 100 to 1000 units per $\varnothing 178\text{mm}$ ($\varnothing 7''$) reel, and 1000 to 2000 units per $\varnothing 330\text{mm}$ ($\varnothing 13''$) reel

12.0 Environmental Specification


Parameter	Description
a. RoHS	Parts are fully compliant with the European Union directives 2002/95/EC and 2011/65/EU on the restriction of the use of certain hazardous substances in electrical and electronic equipment. Note the RoHS compliant parts are suitable for assembly using both Lead-free solders and Tin / Lead solders.
b. Solderability	JESD22-B102, M1, condition E (IPC/EIA J-STD-002A), 245°C for 5s, precondition for 16 hours at +150°C
c. High Temperature Operating Life (HTOL)	JESD22-A108, 1008 hours at +125°C
d. Temperature cycle	JESD22-A104, 500 cycles, -55°C to +125°C
e. Low temperature storage	IEC 60068-2-1 test Ab, 1000 hours at -55°C
f. High temperature storage	IEC 60068-2-2 test Bb, 1000 hours at +125°C
g. Moisture resistance	JESD22-A113, MSL = 1
h. Temperature / Humidity bias	JESD22-A101, 1008 hours at +85°C / 85% R.H., precondition: 3 Reflow cycles (peak temperature 260°C)
i. Mechanical vibration	JESD22-B103, 20g, 60-2000Hz, 4 hours in each of three axes (12 hours total)
j. Mechanical shock	JESD22-B104, 1500g _n , 0.5ms, 5 pulses in each of 6 directions
k. Aging	MIL-PRF-55310, 1008 hours at +85°C, precondition: 3 Reflow cycles (peak temperature 260°C)
l. Resistance to soldering heat	IPC/JEDEC J-STD-020, 3 reflow cycles (peak temperature 260°C)

13.0 Disclaimer

Parameter	Description
a. Disclaimer	"Samples supplied according to this specification are supplied from our development or pre-production programme and as such are not qualification approved products. No condition, warranty or representation regarding quality, suitability, performance, life or continuation of supply is given or implied and Guarantee in clause 6.1 of our standard Conditions of Sale is not applicable. The right is reserved to change the design or specification or cease supply without notice." RAKON Limited

14.0 Model Outline: RPT5032A (6 Pad)

MODEL DRAWING

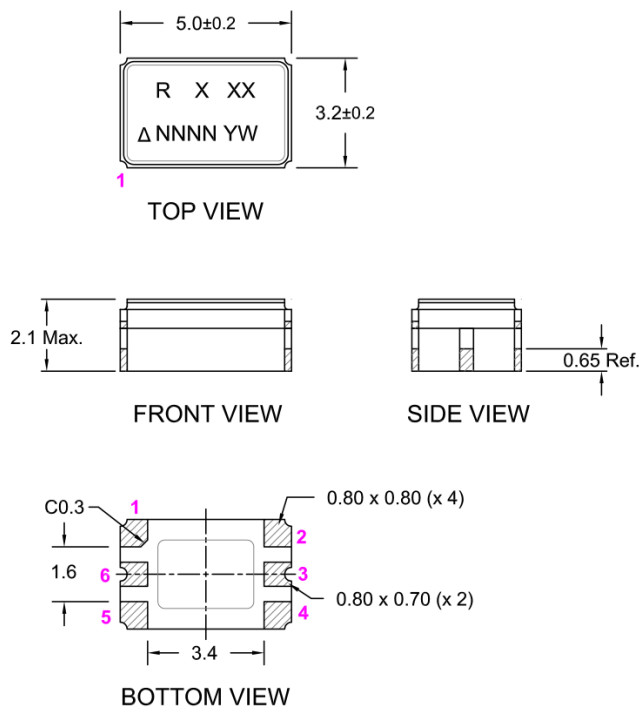


PIN CONNECTIONS	
1 *	Do Not Connect / V_c
2	GND
3 *	Do Not Connect / V_{ref} / V_{temp}
4	RF Output
5	V _{cc}
6	Enable
* Depending on specification	

E6762LFは#1,#3 = Do not Connect になります。

NOTE:

- The area between the pads is a keep-out area, no tracks or ground plane allowed on any layer.

RECOMMENDED PAD LAYOUT - TOP VIEW

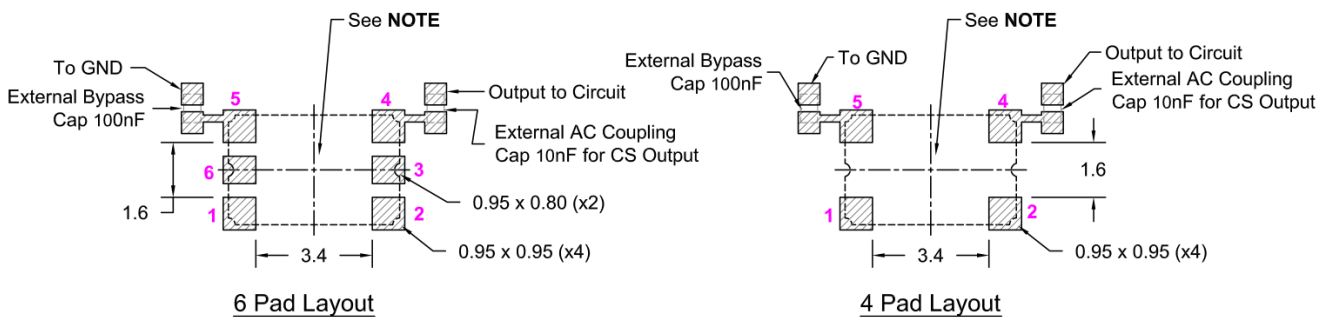

TITLE: RPT5032 MODEL (6 Pad, H2.1mm Max.)

RELATED DRAWINGS:

FILENAME: CAT794

REVISION: C

DATE: 05-Mar-14

SCALE:

Millimetres

TOLERANCES:

XX =

X.X = ±0.2

X.XX = ±0.10

X.XXX =


X° =

Hole =

rakon

© 2013 Rakon Limited

15.0 Test Circuit and Output Waveform: RPT5032A (6 Pad)

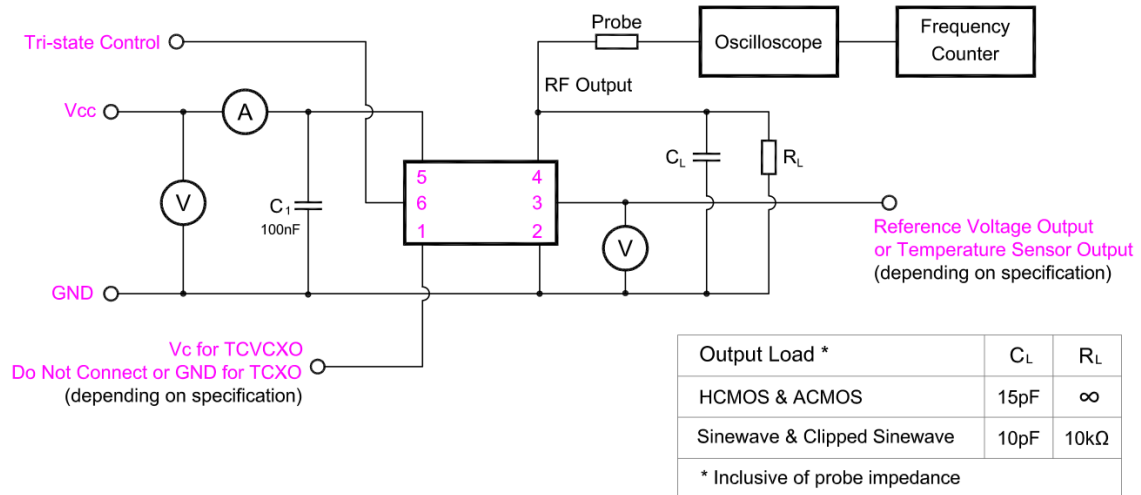

TITLE: Pluto+ TCXO/TCVCXO TEST CIRCUIT

FILENAME: CAT781

RELATED DRAWINGS:

REVISION: A

DATE: 20-Mar-13


SCALE: NTS

Millimetres

rakon

© 2013 Rakon Limited

OUTPUT WAVEFORM - HCMOS & ACMOS:

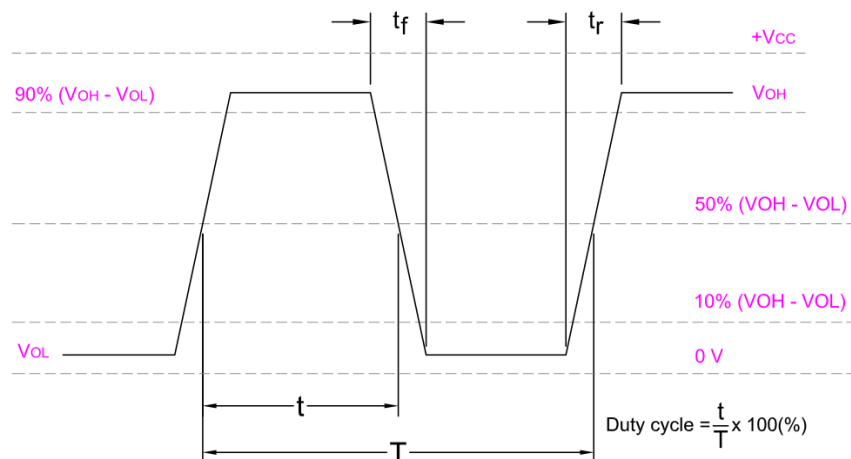

TITLE: Pluto+ TCXO/TCVCXO OUTPUT WAVEFORM

FILENAME: CAT784

RELATED DRAWINGS:

REVISION: A

DATE: 15-Mar-13

SCALE: NTS

Millimetres

rakon


© 2013 Rakon Limited

TAPE DETAILS



- 1) 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2) Camber not to exceed 1.0mm in 250mm.

REEL DETAILS

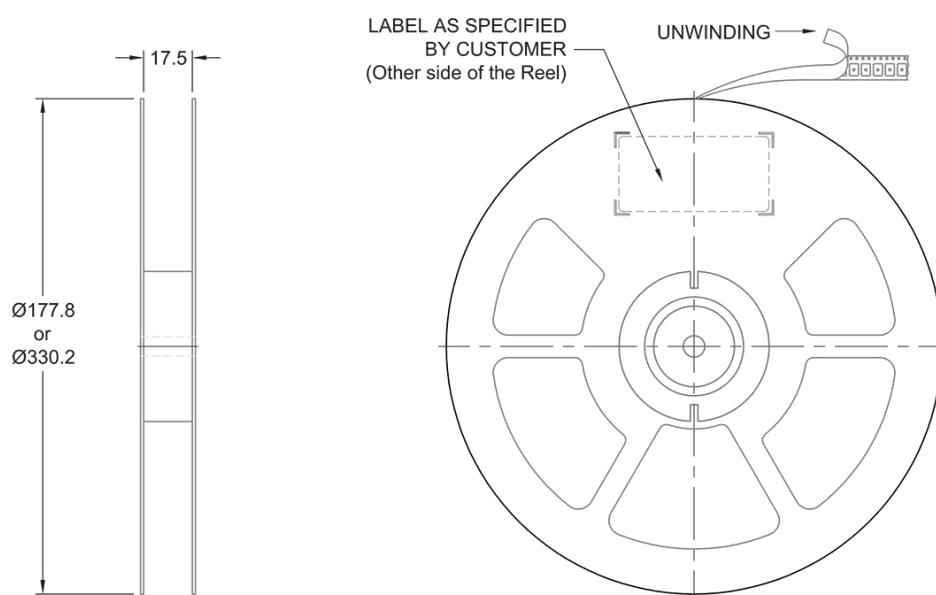

TITLE: PLUTO+ 5032 SERIES TAPE & REEL

RELATED DRAWINGS:

FILENAME: CAT811

REVISION: A

DATE: 12-Aug-13

SCALE:

Millimetres

TOLERANCES:

$$XX =$$
$$X.X = \pm 0.2$$

X.XX = ± 0.10

X.XXX

$$X^{\circ} =$$


Hole =

rakon


© 2013 Rakon Limited

17.0 Reflow: RPT5032A

Pb-Free Reflow Soldering Profile *

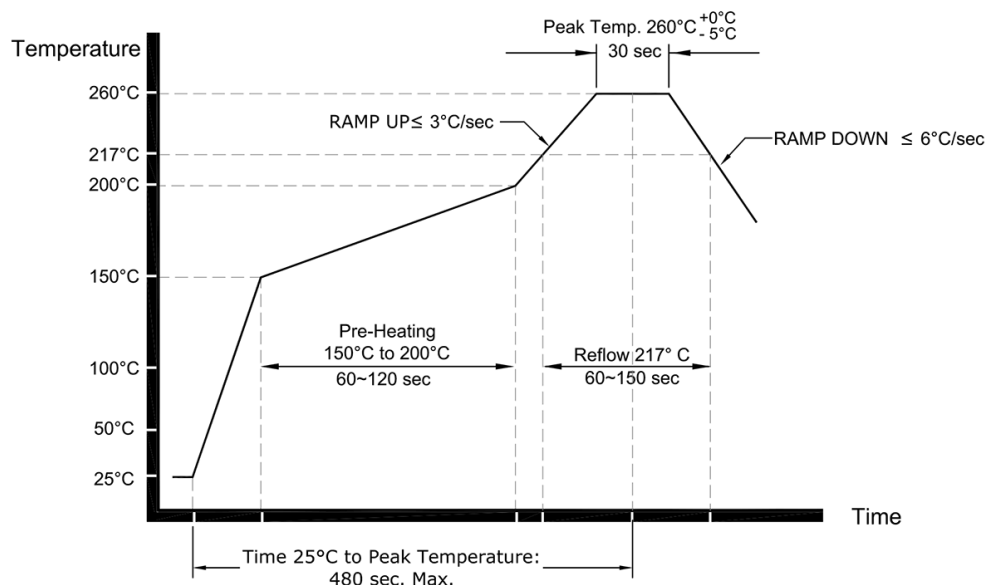

Sn-Pb Eutectic Reflow Soldering Profile *

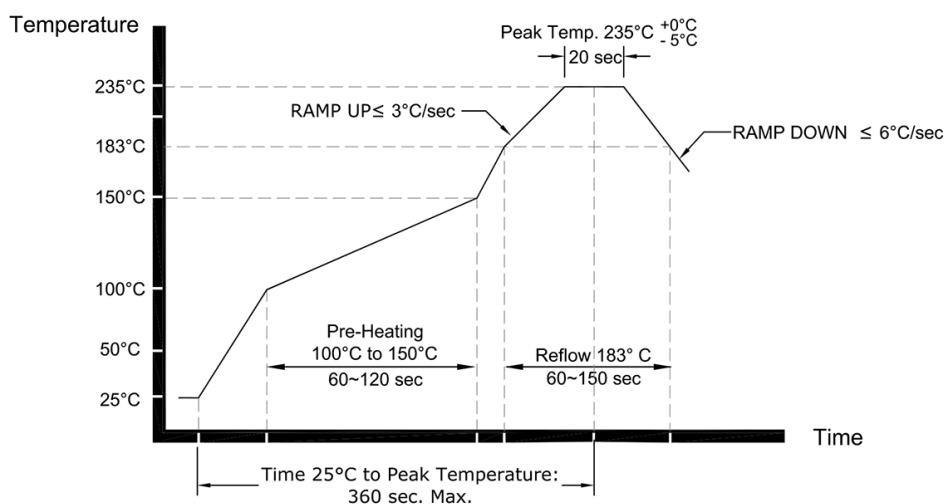

*** NOTE:**

These profile were used during the qualification testing of the product and therefore represents worst case conditions. They are not recommended for use by the customer in the actual assembly of these parts.

TITLE: Pluto 7050 Series TCXO Reflow

FILENAME: CAT711

RELATED DRAWINGS:

REVISION: B

DATE: 25-Jun-13

SCALE: NTS

Millimetres

rakon

© 2013 Rakon Limited

18.0 Specification History

Version	User	Changes	Approver	Date
A.	JO	Datasheet created	MC	2014-12-08